


Reference

The cable offered by PROSE are designed, manufactured and tested according to the standards as follows:

IEC 60794-1-1	Optical fiber cables-part 1-1: Generic specification-General
IEC 60794-1-2	Optical fiber cables-part 1-2: Generic specification-Basic optical cable test procedure
IEC 60794-3	Optical fiber cables-part 3: Sectional specification-Outdoor cables

Cable Cross-section

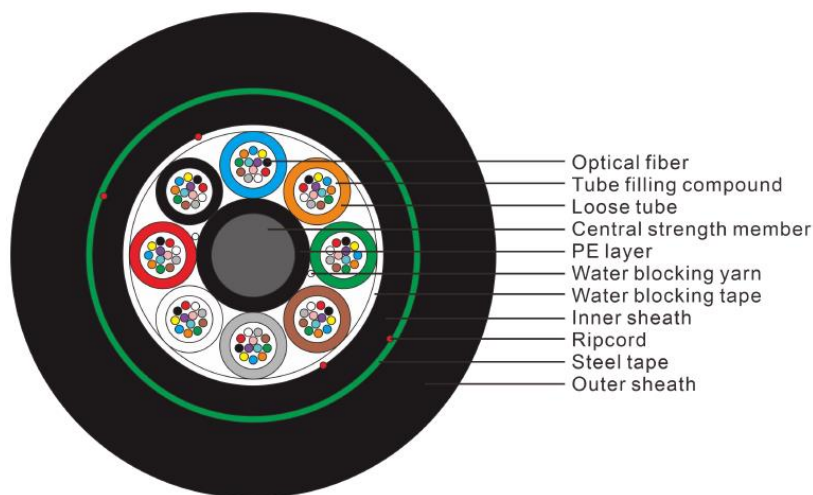

Cable Identification

1. Fiber color code

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Violet	Pink	Aqua

2. Loose tube (LT) & filler rod (FR) color code

Fiber count	Element no.											
	1	2	3	4	5	6	7	8	9	10	11	12
24	LT	LT	FR	FR	FR	FR	FR	FR				
48	LT	LT	LT	LT	FR	FR	FR	FR				
96	LT	LT	LT	LT	LT	LT	LT	LT				

* "LT" means "Loose Tube";

** "FR" means "Filler Rod".

Cable Assembly & Dimensions

Item	Contents	Value	
		24/48	96
Loose tube	Number	2/4	8
	Outer diameter (mm)	2.0±0.2	1.9±0.2
	Thickness(mm)	0.3±0.05	
	Material	PBT	
	Water blocking	Tube filling compound	
Filler	Number	6/4	0
	Material	PP	
Max. Fiber counts per tube	G.652D	12	
Central strength member	Material	Steel wire	
	Diameter (mm)	2.1±0.2	
	PE layer diameter (mm)	3.5±0.2	3.3±0.2
Water blocking	Material	Water blocking yarn & tape	
Ripcord	Number	2	
Inner Sheath	Material	PE	
	Color	Black	
	Thickness (mm)	Nom 1.3, Min 1.1	Nom 1.5, Min 1.3
Ripcord	Number	2	
Armored	Material	Corrugated steel tape	
Outer Sheath	Material	PE	
	Color	Black	
	Thickness (mm)	Nom 2.3, Min 2.0	Nom 2.5, Min 2.2
Cable diameter(mm) Approx.		16.0±5%	16.5±5%
Cable weight(kg/km) Approx.		237±15%	249±15%

Performance of Cabled Optical Fiber

The performance of cabled optical fiber (ITU-T Rec. G.652D)

Item		Specification
Fiber type		Single mode
Fiber material		Doped silica
Attenuation coefficient	@ 1310 nm	≤ 0.35 dB/km
	@ 1383 nm	≤ 0.32 dB/km
	@ 1550 nm	≤ 0.21 dB/km
	@ 1625 nm	≤ 0.24 dB/km
Cable cut-off wavelength		≤ 1260 nm
Zero-dispersion wavelength		1300 ~ 1324 nm
Zero-dispersion slope		≤ 0.092 ps/(nm ² .km)
Micro bending Loss	@ 1550nm (100turns;Φ60mm)	≤ 0.05 dB
Chromatic dispersion	@ 1285 ~ 1340 nm	-3.0~3.0 ps/(nm. km)
	@ 1550 nm	≤ 18 ps/(nm. km)
	@ 1625 nm	≤ 22 ps/(nm. km)
PMD		≤ 0.2 ps/km ^{1/2}
Mode field diameter	@ 1310 nm	9.2 ± 0.4 μm
	@ 1550 nm	10.4 ± 0.8 μm
Core / Clad concentricity error		≤ 0.4 μm
Coating/cladding concentricity error		≤ 12 μm
Cladding diameter		125.0 ± 0.7 μm
Cladding non-circularity		≤ 1.0 %
Primary coating diameter		245 ± 10 μm
Proof stress		≥ 0.69 Gpa

Performance of Optical Fiber Cable

- Cable bending radius: 10 x cable diameter (static)
20 x cable diameter (dynamic)
- Application temperature range

Operating temperature range	: -40°C to +70°C
Storage / Transport temperature range	: -40°C to +70°C
Installation temperature range	: -40°C to +70°C
- Mechanical & environmental performance test

S/N	Item	Test Method	Acceptance Condition
1	Tensile Strength IEC 794-1-21-E1	- Load: 4000N for short term - Length of cable under load: 50 m - Load time: 1min	- Loss change ≤ 0.05 dB @1550 nm - Fiber strain ≤ 0.6 % - No fiber break and no sheath damage.
2	Crush Test IEC 794-1-21-E3	- Load: 3000 N/100mm for short term - Load: 1000 N/100mm for long term - Load time: 1min	- Loss change ≤ 0.05 dB @1550 nm - No fiber break and no sheath damage.
3	Impact Resistance IEC 794-1-21-E4	- Points of impact: 3 - Times of per point: 2 - Impact energy: 6.5J - Radius of hammer head: 12.5mm	- Loss change ≤ 0.05 dB @1550 nm - No fiber break and no sheath damage.
4	Repeated Bending IEC 794-1-21-E6	- Bending radius: 20 x cable diameter - Number of cycle: 25	- Loss change ≤ 0.05 dB @1550 nm - No fiber break and no sheath damage.
5	Torsion IEC 794-1-21-E7	- Length: 2 m - Angle: ± 180 degree - Number of cycle: 10	- Loss change ≤ 0.05 dB/km@1550 nm - No fiber break and no sheath damage.
6	Bend IEC 794-1-21-E11A	- Mandrel diameter: 20*D - No. of Turns: 4 - No. of cycle: 3	- Loss change ≤ 0.05 dB/km@1550 nm - No fiber break and no sheath damage.
7	Water Penetration Test IEC 794-1-22-F5B	- Height of water: 1 m - Sample length: 1 m - Test time: 1 hours	- No water shall have leaked from the opposite end of cable.
8	Temperature Cycling Test IEC 794-1-22-F1	- Temperature step: Transition from 0°C to -40°C: 2hours; duration at -40°C: 8 hours; Transition from -40°C to +85°C: 4hours; duration at +85°C: 8 hours;	- Loss change ≤ 0.05 dB/km @1550 nm - No fiber break and no sheath damage.
		Transition from +85°C to 0°C: 2hours - Number of cycle: 5	
9	Compound Flow IEC 794-1-21-E14	- Sample length: 30 cm - Temp: 70°C $\pm$ 2°C - Time: 24 hours	- No compound flow


Ordering Information

Category	Cable Structure	Fiber Type	Outer Sheath Material	Fiber Count
FC: Fiber Cable	16: Outdoor, Underground Armored	GD: G652D M2: OM2 M3: OM3 M4: OM4 M5: OM5	3: PE	004:4F 012:12F 016:16F 024:24F

Example:

Order Number	Fiber count	Description
FC16-GD3012	12	Cable, Outdoor, Underground Armored, 12F, SM G652D, PE
FC16-M33024	24	Cable, Outdoor, Underground Armored, 24F, MM OM3, PE

GLOBAL FOOTPRINT

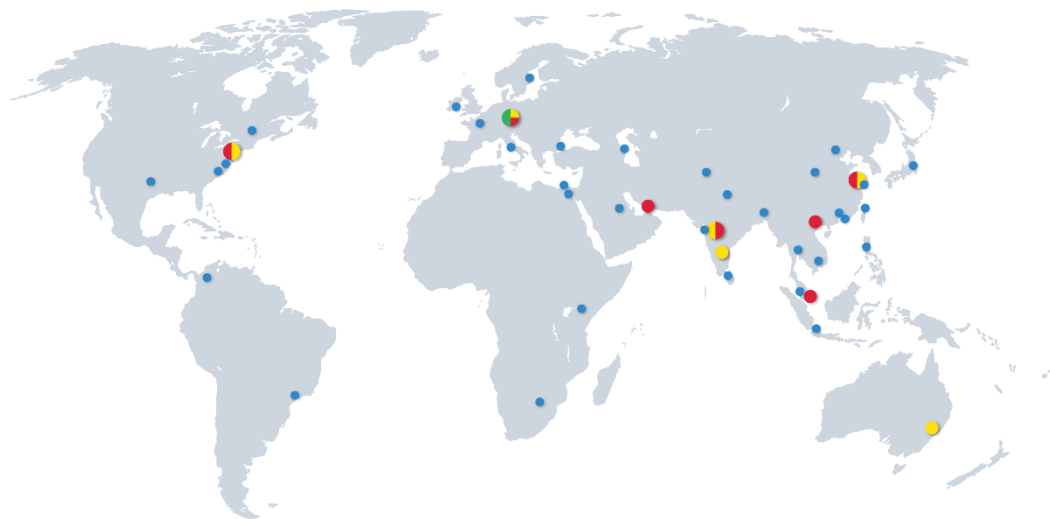

Headquarters

Donauwörth - Germany
PROSE Technologies GmbH
Add.: Dr.-Friedrich-Drechsler-Straße 14, 86609
Donauwörth, Germany
E-mail: info.eu@prosetechnologies.com

Western Europe

Dublin - Ireland
PROSE Technologies (Ireland) Limited
Add.: 6th Floor, South Bank House, Barrow Street,
Dublin 4 Ireland
E-mail: Info@prosetechnologies.com

Eastern Europe & Central Asia

E-mail: info.eeca@prosetechnologies.com

North America

New Jersey - America
PROSE Technologies LLC
Add.: 550 Clark Drive Budd Lake, NJ 07828, United
States of America
Tel: +1 888 840 4066
E-mail: info.us@prosetechnologies.com

Middle East

ubai - UAE
PROSE Technologies DMCC
Add.: 3702, Mazaya Business Avenue BB2, JLT, Dubai
Tel: +971 4 3999168
E-mail: info.ae@prosetechnologies.com

Africa

Nairobi - Kenya
PROSE Technologies Africa (PTY) Ltd
Tel: +254 780440410
E-mail: info.ke@prosetechnologies.com

Gauteng, (Johannesburg) - South Africa
PROSE Technologies Africa (PTY) Ltd
Add.: Building 20, Cambridge Office Park, 5 Bauhina
Road, Highveld Techno Park Centurion, Gauteng 0169,
South Africa
Mobile: +27 725554840
E-mail: info.za@prosetechnologies.com

South Asia

Mumbai - India
PROSE Technologies India Private Limited
Add.: 403-407, Eco Star, Vishveshwar Nagar,
Goregaon East, Mumbai, India 400063
Tel: +91 22-66453000
E-mail: info.in@prosetechnologies.com

Pune - India
PROSE Technologies India Pvt.Ltd
Add.: A-79, Block-A, Horizon Industrial Parks, Phase II,
MDC Chakan Industrial Area, Khed, Pune, India
410501
Tel: +91 2135-635200
E-mail: info.in@prosetechnologies.com

Bangalore - India
PROSE Technologies India Private Limited
Add.: No.494 East End Main Road, Jayanagar IX Block,
Bangalore, India 560069
E-mail: info.in@prosetechnologies.com

New Delhi - India
PROSE Technologies India Pvt.Ltd
Add.: H-3/157, 2nd Floor, Vikas Puri, New Delhi, India
110018
E-mail: info.in@prosetechnologies.com

Dhaka - Bangladesh
PROSE Technologies (Bangladesh) Limited
Add.: House-360 (2nd Floor), Lane-5 (East), Baridhara
DOHS, Dhaka-1206, Bangladesh
Tel: +880 1977070130
E-mail: info.bd@prosetechnologies.com

Islamabad - Pakistan
Add.: Unit 514, 5th Floor, ISE Towers, Islamabad,
Pakistan
Tel: +92 3335357733
E-mail: info.pk@prosetechnologies.com

Sri Lanka
Tel: +880 1977070130
E-mail: info.lk@prosetechnologies.com

South East Asia

Selangor - Malaysia
PROSE Technology (M) Sdn. Bhd
Add.: Unit 2-1, Level 2, The Podium, Tower 3, UOA
Business Park, No 1, Jalan Pengaturcara U1/51a,
Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
Tel: +60 126859319
E-mail: info.my@prosetechnologies.com

Bangkok - Thailand
PROSE Technology (Thailand) Co., Ltd
Add.: 349 SJ Infinite I Business Complex, 9 Floor, Room
905, Vibhavadi Rangsit Road, Chom Phon Sun-district,
Chatuchak District, Bangkok Prowice, Thailand
Tel: +66 80 6606630
E-mail: info.th@prosetechnologies.com

Singapore
PROSE Technologies (Singapore) Pte.Ltd
Add.: 10 Anson Road#13-15 International Plaza
Singapore 079903
Tel: +6598366793
E-mail: info.sg@prosetechnologies.com

Hanoi - Vietnam
PROSE Technologies (Vietnam) Company Limited
Add.: Floor 15, Vinaconex 9 Building, HH-2 Block,
Pham Hung Street, Me Tri Ward, Nam Tu Liem District,
Hanoi, Vietnam
Tel: +84 933086498
E-mail: info.vn@prosetechnologies.com

Taguig - Philippines
PROSE Technologies Philippines, Inc.
Add.: Unit 17 19th Floor Highstreet South Corporate
Plaza Tower 1, 26th Street corner 9th Avenue, Bonifacio
Global City, Taguig City, Philippines
Tel: +63 27572762
E-mail: info.ph@prosetechnologies.com

Jakarta - Indonesia
PT. PROSE Technologies Indonesia
Add.: Plaza Sentral 6th Floor, Jalan Jenderal Sudirman
No. 47, Jakarta 12930, Indonesia
Tel: +62 21 57901997
E-mail: info.id@prosetechnologies.com

East Asia

Suzhou - China
PROSE Technologies (Suzhou) Co.,Ltd
Add.: No. 6, Shen'an Road, DianShanHu, Suzhou,
JiangSu, China
E-mail: Info@prosetechnologies.com

Beijing - China
PROSE Technologies (Beijing) Co.,Ltd
E-mail: Info@prosetechnologies.com

Shanghai - China
PROSE Technologies (Shanghai) Co.,Ltd
E-mail: Info@prosetechnologies.com

Dongguan - China
Add.: Room 1506, building 1, No. 1, Yile Road,
Songshanhu Park, Dongguan City, Guangdong
Province, China
E-mail: Info@prosetechnologies.com

Hongkong - China
PROSE Technologies Company Limited
Add.: Unit B 13/F,Prat Commercial Building, 17-19 Prat
Avenue, Tsimshatsui, Kowloon, HongKong, China
Tel:+86 512 86896789 - 2921/2922
E-mail: info.hk@prosetechnologies.com

Taiwan
Tel: +63 2 7572762
E-mail: info.tw@prosetechnologies.com

Oceania

New South Wales - Australia
PROSE Technologies (Australia) Pty. Ltd
Add.: 5/13 Boundary Rd, Northmead, NSW 2152,
Australia
Tel: +61 2 78055523
E-mail: info.au@prosetechnologies.com