

## VT Series Online UPS



The RM Series 1kVA UPS is a new generation of general-purpose UPS power supply launched by PROSE. It adopts advanced DSP digital control technology, effectively improves product performance and system reliability, and realizes integration and miniaturization of higher power density. At the same time, in order to fully meet the individual needs of users, high -end low-power online UPS power products specially launched for domestic small and medium-sized enterprises and small power supply environment can provide high-reliability power protection for users' departmental servers, small local area networks, workstations, industrial computers, small medical equipment and other small precision electronic instruments.

Small and medium-sized enterprise data room, financial system, small network, industrial automation control system, local area network server, communication base station server, internet cafe, shopping mall cashier, etc.

## Characteristic

### Intelligent Digital Technology

- UPS inverter and PFC adopt the advanced 32-bit high-speed digital signal processor DSP chip as the core control system, which realizes faster data processing and signal control, and greatly improves the performance index and reliability of the whole machine.

### Friendly Man-Machine Interface

- With the design of super-large touch screen, the running status, load status, commercial power status and battery status of UPS are clearly displayed on the panel, so that users can keep abreast of the changes of UPS running status and application environment.

### Power-On Self-Diagnosis Function

- When powering on and starting up, UPS starts to self-check the key circuits, which can identify the input phase sequence and reverse connection of the positive and negative poles of the battery. In order to find problems in time and eliminate hidden troubles.

### 50/60Hz Frequency Adaptive Function

- Automatic frequency identification, adapting to 50Hz/60Hz power supply system, and meeting the requirements of global power supply system.

### Compatible Generator Input

- The input voltage and frequency range are wide, which can better solve the generator configuration and control, and provide clean, safe, and stable power supply for the load.

And Cold Start and Mains Start Functions.

- In case of abnormal mains supply, the UPS can be started directly by batteries to meet the emergency needs.
- When there is no battery, the UPS can be started directly by commercial power, which can be used as a high precision regulated power supply.

EPO Emergency Shutdown Function

- When an emergency happens, the UPS can be turned off quickly.


ECO-Economic Operation Mode

- With ECO economic operation mode, it can be more efficient and energy-saving when the power grid is good and reduce the user's use cost.

### 1-Phase Input and 1-Phase Output RM Series UPS 1kVA:

| Mode                  |                                   | UPS-RM20011-11                                                                                               |
|-----------------------|-----------------------------------|--------------------------------------------------------------------------------------------------------------|
| Power capacity        |                                   | 1kVA/900W                                                                                                    |
| Input                 | Voltage range                     | 110-288VAC(220/230/240VAC)                                                                                   |
|                       | Frequency                         | 40-70Hz                                                                                                      |
|                       | Power factor                      | ≥0.97                                                                                                        |
| Output                | Voltage range                     | 230VAC±1%                                                                                                    |
|                       | Frequency                         | 50/60Hz                                                                                                      |
|                       | Wave form                         | Sinusoidal wave                                                                                              |
|                       | Power factor                      | 0.9                                                                                                          |
|                       | Overload capacity (Inverter mode) | 105%~130%: Bypass is cut after 1 minute; 150%: Bypass after 30 seconds                                       |
|                       | Peak value ratio                  | 3: 1                                                                                                         |
| Efficiency            |                                   | Main road mode 87%; ECO Mode 94%                                                                             |
| Battery               | Mode                              | Depends on the external battery                                                                              |
|                       | Qty                               |                                                                                                              |
|                       | Maximum charging current          | 4A                                                                                                           |
|                       | Dc voltage                        | 36VDC                                                                                                        |
| Communication mode    |                                   | RS 232、SNMP(optional)                                                                                        |
| Option                |                                   | DB9 dry contact card, type B USB port, SNMP communication card, RS 485 interface can be inserted and removed |
| Bypass                |                                   | /                                                                                                            |
| Environment           | Temperature                       | 0-40℃                                                                                                        |
|                       | Humidness                         | 0-95%                                                                                                        |
| Size                  |                                   | 440*4300*86(2U)                                                                                              |
| W*D*H(mm)             |                                   |                                                                                                              |
| Special specification |                                   | Depth of the server cabinet ≥0.8 m                                                                           |
| Weight (kg)           |                                   | 7                                                                                                            |

## GLOBAL FOOTPRINT

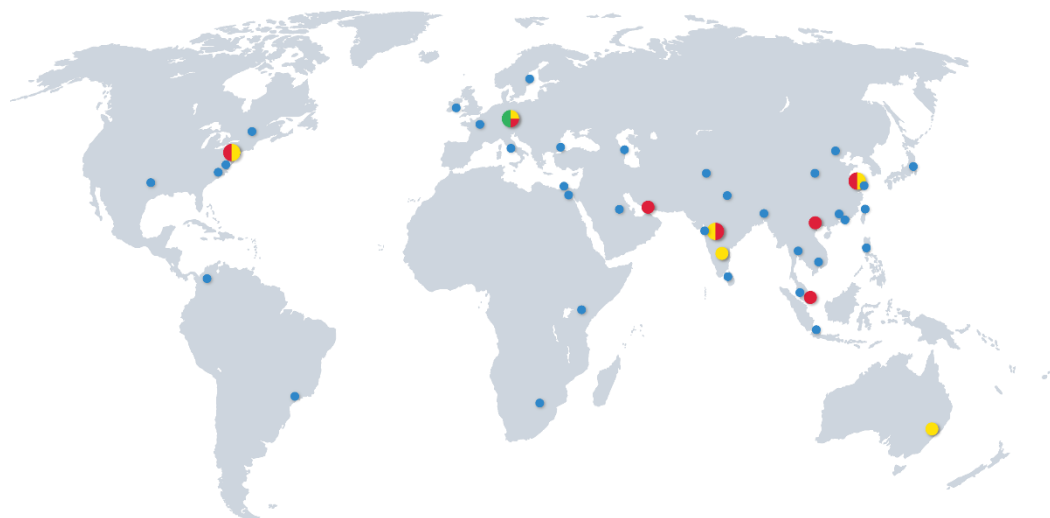

### Headquarters

**Donauwörth - Germany**  
**PROSE Technologies GmbH**  
Add.: Dr.-Friedrich-Drechsler-Straße 14, 86609  
Donauwörth, Germany  
E-mail: [info.eu@prosetechnologies.com](mailto:info.eu@prosetechnologies.com)

### Western Europe

**Dublin - Ireland**  
**PROSE Technologies (Ireland) Limited**  
Add.: 6th Floor, South Bank House, Barrow Street,  
Dublin 4 Ireland  
E-mail: [Info@prosetechnologies.com](mailto:Info@prosetechnologies.com)

### Eastern Europe & Central Asia

E-mail: [info.eeca@prosetechnologies.com](mailto:info.eeca@prosetechnologies.com)

### North America

**New Jersey - America**  
**PROSE Technologies LLC**  
Add.: 550 Clark Drive Budd Lake, NJ 07828, United  
States of America  
Tel: +1 888 840 4066  
E-mail: [info.us@prosetechnologies.com](mailto:info.us@prosetechnologies.com)

### Middle East

**ubai - UAE**  
**PROSE Technologies DMCC**  
Add.: 3702, Mazaya Business Avenue BB2, JLT, Dubai  
Tel: +971 4 3999168  
E-mail: [info.ae@prosetechnologies.com](mailto:info.ae@prosetechnologies.com)

### Africa

**Nairobi - Kenya**  
**PROSE Technologies Africa (PTY) Ltd**  
Tel: +254 780440410  
E-mail: [info.ke@prosetechnologies.com](mailto:info.ke@prosetechnologies.com)

**Gauteng, (Johannesburg) - South Africa**  
**PROSE Technologies Africa (PTY) Ltd**  
Add.: Building 20, Cambridge Office Park, 5 Bauhina  
Road, Highveld Techno Park Centurion, Gauteng 0169,  
South Africa  
Mobile: +27 725554840  
E-mail: [info.za@prosetechnologies.com](mailto:info.za@prosetechnologies.com)

### South Asia

**Mumbai - India**  
**PROSE Technologies India Private Limited**  
Add.: 403-407, Eco Star, Vishveshwar Nagar,  
Goregaon East, Mumbai, India 400063  
Tel: +91 22-66453000  
E-mail: [info.in@prosetechnologies.com](mailto:info.in@prosetechnologies.com)

**Pune - India**  
**PROSE Technologies India Pvt.Ltd**  
Add.: A-79, Block-A, Horizon Industrial Parks, Phase II,  
MIDC Chakan Industrial Area, Khed, Pune, India  
410501  
Tel: +91 2135-635200  
E-mail: [info.in@prosetechnologies.com](mailto:info.in@prosetechnologies.com)

**Bangalore - India**  
**PROSE Technologies India Private Limited**  
Add.: No.494 East End Main Road, Jayanagar IX Block,  
Bangalore, India 560069  
E-mail: [info.in@prosetechnologies.com](mailto:info.in@prosetechnologies.com)

**New Delhi - India**  
**PROSE Technologies India Pvt.Ltd**  
Add.: H-3/157, 2nd Floor, Vikas Puri, New Delhi, India  
110018  
E-mail: [info.in@prosetechnologies.com](mailto:info.in@prosetechnologies.com)

**Dhaka - Bangladesh**  
**PROSE Technologies (Bangladesh) Limited**  
Add.: House-360 (2nd Floor), Lane-5 (East), Baridhara  
DOHS, Dhaka-1206, Bangladesh  
Tel: +880 1977070130  
E-mail: [info.bd@prosetechnologies.com](mailto:info.bd@prosetechnologies.com)

**Islamabad - Pakistan**  
Add.: Unit 514, 5th Floor, ISE Towers, Islamabad,  
Pakistan  
Tel: +92 3335357733  
E-mail: [info.pk@prosetechnologies.com](mailto:info.pk@prosetechnologies.com)

**Sri Lanka**  
Tel: +880 1977070130  
E-mail: [info.lk@prosetechnologies.com](mailto:info.lk@prosetechnologies.com)

### South East Asia

**Selangor - Malaysia**  
**PROSE Technology (M) Sdn. Bhd**  
Add.: Unit 2-1, Level 2, The Podium, Tower 3, UOA  
Business Park, No 1, Jalan Pengaturcara U1/51a,  
Seksyen U1, 40150 Shah Alam, Selangor, Malaysia  
Tel: +60 126859319  
E-mail: [info.my@prosetechnologies.com](mailto:info.my@prosetechnologies.com)

**Bangkok - Thailand**  
**PROSE Technology (Thailand) Co., Ltd**  
Add.: 349 SJ Infinite 1 Business Complex, 9 Floor, Room  
905, Vibhavadi Rangsit Road, Chom Phon Sun-district,  
Chatuchak District, Bangkok Province, Thailand  
Tel: +66 80 6606630  
E-mail: [info.th@prosetechnologies.com](mailto:info.th@prosetechnologies.com)

**Singapore**  
**PROSE Technologies (Singapore) Pte.Ltd**  
Add.: 10 Anson Road#13-15 International Plaza  
Singapore 079903  
Tel: +6598366793  
E-mail: [info.sg@prosetechnologies.com](mailto:info.sg@prosetechnologies.com)

**Hanoi - Vietnam**  
**PROSE Technologies (Vietnam) Company Limited**  
Add.: Floor 15, Vinaconex 9 Building, HH-2 Block,  
Pham Hung Street, Me Tri Ward, Nam Tu Liem District,  
Hanoi, Vietnam  
Tel: +84 933086498  
E-mail: [info.vn@prosetechnologies.com](mailto:info.vn@prosetechnologies.com)

**Taguig - Philippines**  
**PROSE Technologies Philippines, Inc.**  
Add.: Unit 17 19th Floor Highstreet South Corporate  
Plaza Tower 1, 26th Street corner 9th Avenue, Bonifacio  
Global City, Taguig City, Philippines  
Tel: +63 27572762  
E-mail: [info.ph@prosetechnologies.com](mailto:info.ph@prosetechnologies.com)

**Jakarta - Indonesia**  
**PT. PROSE Technologies Indonesia**  
Add.: Plaza Sentral 6th Floor, Jalan Jenderal Sudirman  
No. 47, Jakarta 12930, Indonesia  
Tel: +62 21 57901997  
E-mail: [info.id@prosetechnologies.com](mailto:info.id@prosetechnologies.com)

### East Asia

**Suzhou - China**  
**PROSE Technologies (Suzhou) Co.,Ltd**  
Add.: No. 6, Shen'an Road, DianShanHu, Suzhou,  
JiangSu, China  
E-mail: [Info@prosetechnologies.com](mailto:Info@prosetechnologies.com)

**Beijing - China**  
**PROSE Technologies (Beijing) Co.,Ltd**  
E-mail: [Info@prosetechnologies.com](mailto:Info@prosetechnologies.com)

**Shanghai - China**  
**PROSE Technologies (Shanghai) Co.,Ltd**  
E-mail: [Info@prosetechnologies.com](mailto:Info@prosetechnologies.com)

**Dongguan - China**  
Add.: Room 1506, building 1, No. 1, Yile Road,  
Songshanhu Park, Dongguan City, Guangdong  
Province, China  
E-mail: [Info@prosetechnologies.com](mailto:Info@prosetechnologies.com)

**Hongkong - China**  
**PROSE Technologies Company Limited**  
Add.: Unit B 13/F Prat Commercial Building, 17-19 Prat  
Avenue, Tsimshatsui, Kowloon, HongKong, China  
Tel: +86 512 86896789 - 2921/2922  
E-mail: [info.hk@prosetechnologies.com](mailto:info.hk@prosetechnologies.com)

**Taiwan**  
Tel: +63 2 7572762  
E-mail: [info.tw@prosetechnologies.com](mailto:info.tw@prosetechnologies.com)

### Oceania

**New South Wales - Australia**  
**PROSE Technologies (Australia) Pty. Ltd**  
Add.: 5/13 Boundary Rd, Northmead, NSW 2152,  
Australia  
Tel: +61 2 78055523  
E-mail: [info.au@prosetechnologies.com](mailto:info.au@prosetechnologies.com)