

Application

Prose Cat6 crystal plugs are designed for shielded and unshielded cabling system application. All plugs can be crimped with standard crimping tools.

Profile



Unshielded, one-piece



Unshielded, two-piece



Shielded, one-piece



Shielded, binder clip, two-piece

Features/Benefits


- Reliable electrical performance, offering stable electrical connections.
- High compatibility, highly compatible with various network devices which allows for seamless integration within different network setups.
- Simple structure and easy installation, straightforward design which facilitating quick and uncomplicated installation.

Comply and exceed TIA-568.2-D, ISO 11801 requirements.	
RoSH compliance	Compliant.
FCC and ANSI compliance	Meets ANSI/TIA-1096-A (formerly FCC part 68).
IEC compliance	IEC-60603-7.
PoE compliance	Supports PoE, PoE+ and proposed type 3 and 4 PoE++ applications for up to 100W.


Technical Performance

Plug Housing	UL94V-0 rated clear polycarbonate.
Contacts	Gold plated phosphor bronze.
Cable jacket diameter range	5.7mm-6.4mm
Conductor insulation diameter range	0.91mm-1.mm
Operating temperature	-10°C-60°C
Storage temperature	-40°C-70°C


Dimension

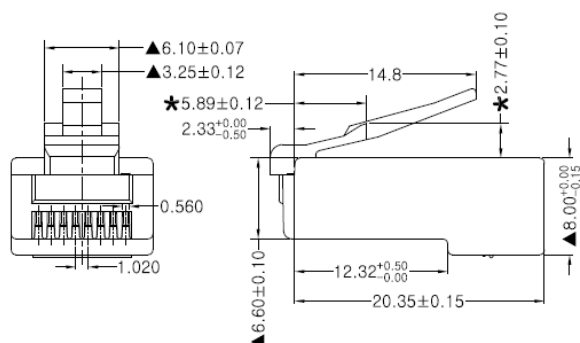

Cat6 UTP One-piece 1.1mm

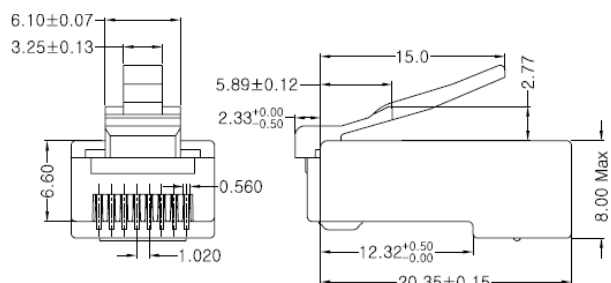

Cat6 UTP Two-pieces 1.06mm

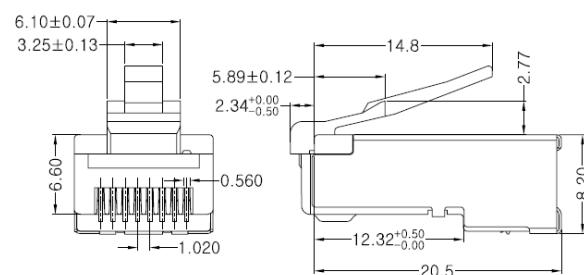

Cat6 FTP One-piece 1.3mm

Ordering Information

Order Number	Description
PG60-11	RJ45 Plug, Cat6, Unshielded, One Part, 50U
PG60-15	RJ45 Plug, Cat6, Unshielded, One Part, 15U
PG60-16	RJ45 Plug, Cat6, Unshielded, Two Part, 15U
PG60-21	RJ45 Plug, Cat6, Shielded FTP, One Part, 50U

Rev. 1.0 | 3 / 3